



Mark Scheme (Post- Standardisation) Summer 2026

Pearson Edexcel International Advanced Level

In Mechanics M2 (WME02)

Paper 01

Edexcel and BTEC Qualifications

Edexcel and BTEC qualifications are awarded by Pearson, the UK's largest awarding body. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information visit our qualifications websites at www.edexcel.com or www.btec.co.uk. Alternatively, you can get in touch with us using the details on our contact us page at www.edexcel.com/contactus

Pearson: helping people progress, everywhere

Pearson aspires to be the world's leading learning company. Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at:

www.pearson.com/uk

Summer 2026

Question Paper Log Number P81328A

Publication Code WME02_01_2606_MS

All the material in this publication is copyright

© Pearson Education Ltd

General Marking Guidance

- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded. Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- When examiners are in doubt regarding the application of the mark scheme to a candidate's response, the team leader must be consulted.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

EDEXCEL IAL MATHEMATICS

General Instructions for Marking

1. The total number of marks for the paper is 75.
2. The Edexcel Mathematics mark schemes use the following types of marks:
 - **M** marks: Method marks are awarded for 'knowing a method and attempting to apply it', unless otherwise indicated.
 - **A** marks: Accuracy marks can only be awarded if the relevant method (M) marks have been earned.
 - **B** marks are unconditional accuracy marks (independent of M marks)
 - Marks should not be subdivided.

3. Abbreviations

These are some of the traditional marking abbreviations that will appear in the mark schemes and can be used if you are using the annotation facility on ePEN.

- bod – benefit of doubt
- ft – follow through
- the $\checkmark$ symbol will be used for correct ft
- cao – correct answer only
- cso – correct solution only. There must be no errors in this part of the question to obtain this mark
- isw – ignore subsequent working
- awrt – answers which round to
- SC: special case
- oe – or equivalent (and appropriate)
- d... or dep – dependent
- indep – independent
- dp decimal places
- sf significant figures
- * The answer is printed on the paper or ag- answer given

• or d... The second mark is dependent on gaining the first mark

4. All A marks are 'correct answer only' (cao.), unless shown, for example, as A1 ft to indicate that previous wrong working is to be followed through. After a misread however, the subsequent A marks affected are treated as A ft, but manifestly absurd answers should never be awarded A marks.
5. For misreading which does not alter the character of a question or materially simplify it, deduct two from any A or B marks gained, in that part of the question affected. If you are using the annotation facility on ePEN, indicate this action by 'MR' in the body of the script.
6. If a candidate makes more than one attempt at any question:
 - If all but one attempt is crossed out, mark the attempt which is NOT crossed out.
 - If either all attempts are crossed out or none are crossed out, mark all the attempts and score the highest single attempt.
7. Ignore wrong working or incorrect statements following a correct answer.

General Principles for Mechanics Marking

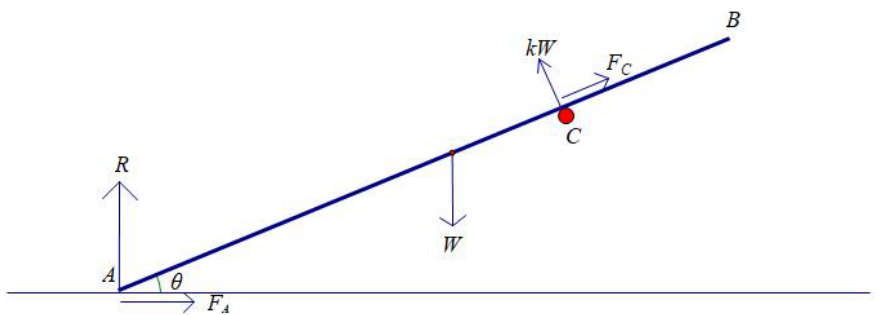
(**N.B.** specific mark schemes may sometimes override these general principles)

- Rules for M marks:
 - correct number of terms
 - dimensionally correct
 - all terms that need resolving (i.e. *multiplied* by cos or sin) are resolved
 - only terms that need resolving are resolved
 - +/- errors are condoned
 - sin/cos confusion is condoned
- Omission or extra g in a resolution is an accuracy error not method error.
- Omission of mass from a resolution is a method error.
- Omission of a length from a moments equation is a method error.
- Omission of units or incorrect units is not (usually) counted as an accuracy error.
- DM indicates a dependent method mark, i.e. one that can only be awarded if a previous specified method mark(s) has been awarded.
- Any numerical answer which comes from use of $g = 9.8$ should be given as a decimal to 2 or 3 SF.
- Use of $g = 9.81$ should be penalised once per (complete) question.
 - N.B. Over-accuracy or under-accuracy of correct answers should only be penalised once per complete question. However, premature approximation should be penalised every time it occurs.
- Marks must be entered in the same order as they appear on the mark scheme.
- In all cases, if the candidate clearly labels their working under a particular part of a question i.e. (a) or (b) or (c)...then that working can only score marks for that part of the question.
- Accept column vectors in all cases.

Misreads – if a misread does not alter the character of a question or materially simplify it, deduct two from any A or B marks gained, bearing in mind that after a misread, the subsequent A marks affected are treated as A ft

1			Accept vectors given as column vectors throughout this question.
a	Differentiate $\mathbf{r}$ with respect to t	M1	Obtain $(ae^{2t})\mathbf{i} + (12 + be^{2t})\mathbf{j}$ where $ab \neq 0$. If $\mathbf{i}$ or $\mathbf{j}$ missing and not recovered in (a) then M0.
	Obtain $(\mathbf{v} =)(8e^{2t})\mathbf{i} + (12 - 2e^{2t})\mathbf{j}$	A1	Correct only (seen or implied). Condone missing brackets and allow missing $\mathbf{i}$ or $\mathbf{j}$ only if recovered in (a).
	Substitute $t = 3$ to obtain $(\mathbf{v} =)(8e^6)\mathbf{i} + (12 - 2e^6)\mathbf{j}(\text{ms}^{-1})$	A1	Or exact equivalent. Condone missing brackets but must be a vector. ISW if go on to find the speed.
		[3]	
b	Differentiate $\mathbf{v}$ with respect to t	M1	Obtain $(ce^{2t})\mathbf{i} + (de^{2t})\mathbf{j}$ where $cd \neq 0$. Must be a vector.
	$(\mathbf{a} =)(16e^{2t})\mathbf{i} - (4e^{2t})\mathbf{j}(\text{ms}^{-2})$	A1	Correct only.
	Equate the $\mathbf{i}$ and $\mathbf{j}$ components of their $\mathbf{v}$ and solve for T or e^{2T}	M1	$8e^{2T} = 12 - 2e^{2T} \Rightarrow e^{2T} = \frac{6}{5}$ or equivalent $(T = \frac{1}{2} \ln \frac{6}{5})$ Allow working in t
	$(\mathbf{a} =)19.2\mathbf{i} - 4.8\mathbf{j}(\text{ms}^{-2})$	A1	Or exact equivalent. Allow, for example: $\frac{96}{5}\mathbf{i} - \frac{24}{5}\mathbf{j}$, $16e^{\ln \frac{6}{5}}\mathbf{i} - 4e^{\ln \frac{6}{5}}\mathbf{j}$ ISW once correct answer seen or if they go on to find the magnitude
		[4]	
		(7)	

2a	Impulse momentum equation	M1	Dimensionally correct. Condone subtraction either way round but must be subtraction.
	$\pm \mathbf{I} = 5(a\mathbf{i} + \mathbf{j}) - 5(2\mathbf{i} + 3\mathbf{j})$ $(= 5(a - 2)\mathbf{i} - 10\mathbf{j})$	A1	Correct unsimplified equation. Allow vector or scalar for $\mathbf{I}$ including e.g. $10\sqrt{2}$ or $10\sqrt{2}\mathbf{i}$ LHS may be implied by subsequent working.
	Correct use of Pythagoras' in an equation $2\sqrt{2} = \sqrt{(a - 2)^2 + (-2)^2}$	M1	$25(a - 2)^2 + 100 = 200$ or equivalent. Allow numerical slip but must be addition of components ² .
	$\Rightarrow a = 4$	A1	Obtain correct answer from correct working If $a = 0$ is stated, it must be rejected.
		[4]	
2b	$\theta^\circ = \tan^{-1} \frac{3}{2} - \tan^{-1} \frac{1}{4}$ or $\tan^{-1} \frac{4}{1} - \tan^{-1} \frac{2}{3}$	M1	Correct use of trig to find the required angle using their a
	$\theta = 42.3$	A1	Accept ± 42 or better (42.2736....) or 318 or better.
		[2]	
2b alt	$\cos \theta^\circ = \frac{2 \times 4 + 3}{\sqrt{13}\sqrt{1^2 + 4^2}}$	M1	Correct use of scalar product or cosine rule with their " a "
	$\theta = 42.3$	A1	Accept 42 or better (42.2736....) or 318 or better
		[2]	
		(6)	

3a	M(A)	M1	Dimensionally consistent (i.e. allow without a) with the required terms and no others. Condone sin / cos confusion but LHS must have an attempt at resolving. M0 if kW is vertical.
	$3a \cos \theta \times W = 4a \times kW$	A1	Correct unsimplified equation. Allow N , R_C , etc. for kW
	$k = \frac{3}{5}$	A1	Exact value only
		[3]	
			
3b	Resolve horizontally	M1	Dimensionally correct. Contains all relevant terms and no others. Condone sign errors and sine / cosine confusion. F_A and F_C must be different. kW and R must be different.
	$F_A + F_C \cos \theta = kW \sin \theta$	A1	Correct unsimplified equation. Allow any alternative for kW but must not be same as R .
	Resolve vertically	M1	Dimensionally correct. Contains all relevant terms and no others. Condone sign errors and sine / cosine confusion. kW and R must be different.
	$R + kW \cos \theta + F_C \sin \theta = W$	A1	Correct unsimplified equation.

			Allow any alternative for kW but must not be same as R .
	$F_A = \frac{3}{5} \times W \times \frac{3}{5} - \frac{1}{6} \times \frac{3}{5} \times W \times \frac{4}{5} \left(= \frac{7}{25} W \right)$ $R = W - \frac{3}{5} \times W \times \frac{4}{5} - \frac{1}{6} \times \frac{3}{5} \times W \times \frac{3}{5} \left(= \frac{23}{50} W \right)$	DM1	Substitute for $\cos \theta$, $\sin \theta$ and k in their equations and use $F = \mu R$ at A and at C Dependent on the two preceding M marks. Condone inexact working for this mark.
	$\Rightarrow \mu = \frac{14}{23}$	A1	From exact working only. Or exact equivalent e.g. $\frac{350}{575}$
		[6]	
		(9)	
N.B. Either of the vertical / horizontal equations could be replaced by any of the below. If multiple equations given, mark the "best" two. On open, mark the highest scoring first.			
	Resolve parallel to beam	M1	M1: Dimensionally consistent. Contains all relevant terms and no others. Condone sign errors and sin/cos confusion. F_A and F_C must be different. kW and R must be different.
	$R \sin \theta + F_A \cos \theta + F_C = W \sin \theta$	A1	
	Resolve perpendicular to beam	M1	
	$R \cos \theta + kW = F_A \sin \theta + W \cos \theta$	A1	
	Moments about C	M1	
	$4a \cos \theta \times R = a \cos \theta \times W + 4a \sin \theta \times F_A$	A1	
	Moments about B	M1	A1: Correct unsimplified equation. Allow any alternative for kW but must not be same as R .
	$6a \cos \theta \times R + 2a \times kW = 3a \cos \theta \times W + 6a \sin \theta \times F_A$	A1	
	Moments about midpoint of AB	M1	
	$3a \cos \theta \times R = a \times kW + 3a \sin \theta \times F_A$	A1	

4a			
	$F_{\max} = \frac{1}{4} 2g \cos \alpha$	M1	Correct use of $F = \mu R$ Condone sine / cosine confusion
	$= 2.94(\text{N})$ or $2.9(\text{N})$ or $0.3g$	A1	2 sf or 3 sf only if exact multiple of g not seen. E.g. $\frac{147}{50}$ on its own is A0 but $\frac{3g}{10} = \frac{147}{50}$ is A1
		[2]	
4b	Work done against friction = $2.5 \times F_{\max} = 2.5 \times \frac{1}{4} \times 2g \times \frac{3}{5}$	B1ft	Correct substituted expression. May see within a work-energy equation. Condone sine / cosine confusion. Award for 7.4(J) or 7.35(J) or $2.5 \times \text{their } (a)$
	GPE lost = GPE lost by B – GPE gained by A	M1	Need both terms. May see within a work-energy equation. Dimensionally correct, Allow subtraction in either order (addition is M0). Condone sine / cosine confusion.
	$= 3g \times 2.5 - 2g \times 2.5 \sin \alpha$ ($= 73.5 - 39.2 = 34.3$)	A1	Correct unsimplified expression. Award for GPE gain of -34.3
	Work energy equation: KE gained = GPE lost – WD against friction (or equivalent)	M1	Must be using work-energy Need all terms and no extras (M0 if any GPE is double-counted or missing or if WD against friction is just a force). Condone sign errors.
	$\frac{1}{2} \times 2v^2 + \frac{1}{2} \times 3v^2 = \text{their } 34.3 - \text{their } 7.35$	A1ft	Ft their values for WD against friction and GPE lost.
	$v = 3.3(\text{ms}^{-1})$ or $3.28(\text{ms}^{-1})$	A1	2 sf or 3 sf only
	N.B. May see all parts contained in a single equation. Still assign marks as: B1ft (friction), M1A1 (GPE), M1A1ft (KE = WD), A1 (answer). It is possible to score e.g. B1M0A0M1A1A0.		

		[6]	
		(8)	

5a	Distance from $C = \frac{6a \sin \frac{1}{4} \pi}{3 \times \frac{1}{4} \pi}$				M1	Correct use of the given formula. Use of $\alpha = \frac{\pi}{2}$ is M0 Use of degrees is M0 but allow a “restart”
	Distance from CD $= \frac{6a \sin \frac{1}{4} \pi}{3 \times \frac{1}{4} \pi} \times \cos \frac{1}{4} \pi = \frac{4a}{\pi} *$				A1*	Obtain given answer from full and correct working. Might use Pythagoras or $\times \sin \frac{1}{4} \pi$; may see working marked on Figure 3. Must have some justification for multiplying by $\frac{\sqrt{2}}{2}$
					[2]	
5b		Rectangle	Sector	Lamina	B1	Correct area ratios for all three (allow with a or a^2 correctly cancelled)
	Area	$24a^2$	$\frac{9a^2}{4} \pi$	$a^2 \left(24 - \frac{9\pi}{4}\right)$		
	CoM from AF	$3a$	$6a - \frac{4a}{\pi}$	(d)	B1	Correct distances for rectangle and sector. Allow from any parallel axis (e.g. CE).
	CoM from CE	$3a$	$\frac{4a}{\pi}$	$(6a - d)$		
	Moments about AF or a parallel axis				M1	Dimensionally consistent. Condone sign errors.
	E.g. $24a^2 \times 3a - \frac{9a^2}{4} \pi \times \left(6a - \frac{4a}{\pi}\right) = a^2 \left(24 - \frac{9\pi}{4}\right) d$ or $24 \times 3a - \frac{9}{4} \pi \times \left(\frac{4a}{\pi}\right) = \left(24 - \frac{9\pi}{4}\right) \bar{x}$				A1	Correct unsimplified equation (allow $\bar{x}$ etc. instead of d). Condone invisible brackets for this mark. $\bar{x}$ may be implied, E.g. by a moments expression divided by total area.
	$d = \frac{24 \times 3a - \frac{9}{4} \pi \times \left(6a - \frac{4a}{\pi}\right)}{\left(24 - \frac{9\pi}{4}\right)} = \frac{96 \times 3a - 54\pi a + 36a}{(96 - 9\pi)}$ $d = \frac{108 - 18\pi}{32 - 3\pi} a *$				A1*	Obtain given answer from full and correct working (if brackets are missing from working penalise via this mark). Must see at least one line of working between moments equation and printed answer. Need to include $d = \dots$ not just $\bar{x}$
					[5]	
5c	Moments about AC or a parallel axis				M1	Dimensionally consistent. Condone sign errors

	Eg. $24a^2 \times 2a - \frac{9\pi a^2}{4} \times \frac{4a}{\pi} = \bar{y}_{AC} \times a^2 \left(24 - \frac{9\pi}{4}\right)$ or $24 \times 2a - \frac{9\pi}{4} \times \left(4a - \frac{4a}{\pi}\right) = \bar{y}_{FE} \times \left(24 - \frac{9\pi}{4}\right)$ $\left[\bar{y}_{AC} = \frac{156a}{96 - 9\pi} = \frac{52a}{32 - 3\pi}\right]$ or $\left[\bar{y}_{FE} = \frac{76 - 12\pi}{32 - 3\pi}a\right]$	A1	Correct unsimplified equation for their axis
	$\text{angle} = \tan^{-1}\left(\frac{d}{\bar{y}_{AC}}\right) = \tan^{-1}\frac{108 - 18\pi}{52}$	M1	Correct use of trig with d as given in (a) and denominator as their distance from AC to find the required angle. Use of $\bar{y} = 2a$ is M0.
	$= 44.7^\circ$ or 0.78 radians	A1	Accept 45° or better. 44.696127... (0.780094...radians)
		[4]	
		(11)	

6a			
	Equation for CLM	M1	o.e. e.g equal and opposite impulse Need all terms. Dimensionally consistent. Condone sign errors
	$2m \times 4u + 4m \times u = 2m \times w + 4m \times v$ ($6u = w + 2v$)	A1	Correct unsimplified equation
	Correct use of impact law	M1	Must be used the right way round and dimensionally correct. Condone sign errors
	$v - w = e(4u - u)$ ($v - w = 3eu$)	A1	Correct unsimplified equation
	$\Rightarrow 3v = 6u + 3eu, \quad v = 2u + eu^*$	A1*	Obtain given answer from full and correct working.
		[5]	
6b	$w = 2u - 2eu$ or $v = 3u - \frac{w}{2}$	B1	Or equivalent. Must be seen in (b).
	$0 < w < 2u$	B1	Uses $e > 0$ or $v > 2u$ or $w < v$ to form inequality from correct working only. Must include lower inequality and both must be strict.
		[2]	
6c			
	Form equations for CLM and impact law.	M1	Both equations dimensionally correct and contain all relevant terms with initial speed of Q as given in part (a) in the correct direction.
	$4mu(2+e) = 4mx + 5my$ $y - x = e \times (2+e)u$	A1	Correct unsimplified equations
	Solve for x	M1	Solve for x in terms of u and e .
	$x = \frac{1}{9}(8u - 6ue - 5e^2u)$	A1	Or equivalent (could be negative) e.g. $x = \frac{1}{9}(2+e)(4-5e)u$

	E.g. $w - x = (2 - 2e)u - \frac{1}{9}(2 + e)(4 - 5e)u$ $= \frac{u}{9}(10 - 12e + 5e^2)$	M1	Find the difference between their x and their w to produce a three-term quadratic expression in e
	$5\left(e - \frac{6}{5}\right)^2 + \frac{14}{5} > 0$ So $w > x$ and there will be a second collision.	A1*	Correct conclusion with correct justification (e.g. $x < w$ so collision) Condone missing $\frac{1}{9}u$ for the justification. Might use discriminant and coefficient of e^2 as justification.
		[6]	
		(13)	

7a	Correct use of $P = Fv$	M1	Need to see value substituted correctly. E.g. $F = \frac{12000}{v}$ Condone incorrect number of zeros
	Equation of motion for the van and trailer	M1	Need all terms. Condone sine / cosine confusion. Condone sign errors. Allow with F or D . Dimensionally correct. M0 if acceleration included unless subsequently taken as zero. If equations of motion for car and trailer are separate, award only when combined.
	$\frac{12000}{v} - 600 - 1100g \sin \theta = 0$	A1	Correct unsimplified equation in v (may also have θ and g)
	Obtain 8.0 or 8.01	A1	2 sf or 3 sf only
		[4]	
7b	Need 2 equations. M1A1 for each equation. Use the mass from the ma term to determine which part of the system is being considered. If three equations given, mark the “best” two. On open, mark the highest scoring first.		
	First equation e.g. Equation of motion for the van and the trailer	M1	Need all terms. Condone sine / cosine confusion. Condone sign errors. Dimensionally correct (E.g. 4000×2 for driving force is M0).
	$\frac{4000}{2} - 600 - 1100g \sin \theta = 1100a$ $(a = 0.456 \text{ ms}^{-2})$	A1	Correct unsimplified equation
	Second equation e.g. Equation of motion for the van or the trailer	M1	Need all terms. Condone sine / cosine confusion. Condone sign error Dimensionally correct (E.g. 4000×2 for driving force is M0).
	$T - 300g \sin \theta - 200 = 300a$ Or $\frac{4000}{2} - 400 - 800g \sin \theta - T = 800a$	A1	Correct unsimplified equation
	Substitute for trig and solve for T	DM1	Dependent on the two preceding M marks
	$T = 582(\text{N})$ or $580(\text{N})$	A1	2 sf or 3 sf only (over-accuracy or under-accuracy of correct answers should only be penalised once per complete question)
		[6]	
		(10)	

8a	Equation for horizontal motion	M1	Complete method to form an equation in t and θ only
	$49 \cos \theta \times t = 40$	A1	Correct unsimplified equation
	Equation for vertical motion	M1	Complete method to form an equation in t and θ only. Must be using height of 3.
	$3 = 49 \sin \theta \times t - \frac{1}{2} g t^2$	A1	Correct unsimplified equation
	$t = \frac{40}{49 \cos \theta} \Rightarrow$ $3 = 49 \sin \theta \cdot \frac{40}{49 \cos \theta} - \frac{1}{2} \times 9.8 \times \frac{40^2 \sec^2 \theta}{49^2}$ $6 = 80 \tan \theta - \frac{320}{49} (1 + \tan^2 \theta)$	DM1	Form an equation in $\tan \theta$ only using a correct trigonometric identity oe. Dependent on the first 2 M marks Any equivalent form.
	$320 \tan^2 \theta - 3920 \tan \theta + 614 = 0$ $a = 320, b = -3920, c = 614$	A1	Or equivalent to 3 significant figures e.g. A1 for: $a = 160, b = -1960, c = 307$ or $a = 7840, b = 96000, c = 15000$ but A0 for $a = 7840, b = 96040, c = 15043$
		[6]	
8b	Min speed $(= 49 \cos 30^\circ) = 42 (\text{ms}^{-1})$	B1	Or better $\left(\frac{49\sqrt{3}}{2} = 42.435... \right)$. Must be seen as the answer to (b). Do not ISW if they go on to find a different speed but condone rounding errors after a correct answer is seen.
		[1]	
8c	Time to point above Y $\frac{40}{42.4...} = 0.94(3) (\text{s})$	M1	Complete method using <i>suvat</i> .
	Vertical speed $v = 49 \sin 30^\circ - gt$ $(= 15.2... (\text{ms}^{-1}))$	M1	Complete method using <i>suvat</i> . Use of $s=3$ (e.g. with $v^2 = u^2 + 2as$) is M0.
	$v^2 = (15.2...)^2 + 42.4^2$	DM1	Complete method to obtain the speed at required position (i.e. not top of pole). Dependent on second M mark (i.e. having a vertical speed at required point).
	$v = 45 (\text{ms}^{-1})$ or $45.1 (\text{ms}^{-1})$	A1	2 sf or 3 sf only
		[4]	

8c alt	Use equation of the trajectory with $\theta = 30^\circ$	M1	$y = 40 \tan 30^\circ - \frac{160}{49}(1 + \tan^2 30^\circ)$ $y \neq 3$ i.e. not using their answer to (a) with $\theta = 30^\circ$
	Use $x = 40$ to obtain y	M1	$y = 18.7....$
	Form equation for conservation of energy	DM1	$\frac{1}{2}m(v^2 - 49) = mgy$ Dependent on second M mark i.e. having found a y .
	$v = 45(\text{ms}^{-1})$ or $45.1(\text{ms}^{-1})$	A1	2 sf or 3 sf only
		[4]	
		(11)	